

Performance

**Mini Pumps that Deliver  
Maximum Performance**

**Compact**

Fit in your hand

**Powerful**

Pump up to 6.8 GPM

**Adaptable**

Mount in any configuration

**Versatile**


Available in a variety of materials

**Dependable**

Elima-Matic® Air Valve System  
with Shoe Valve technology

**Repairable**

Kits available for both air and wet end

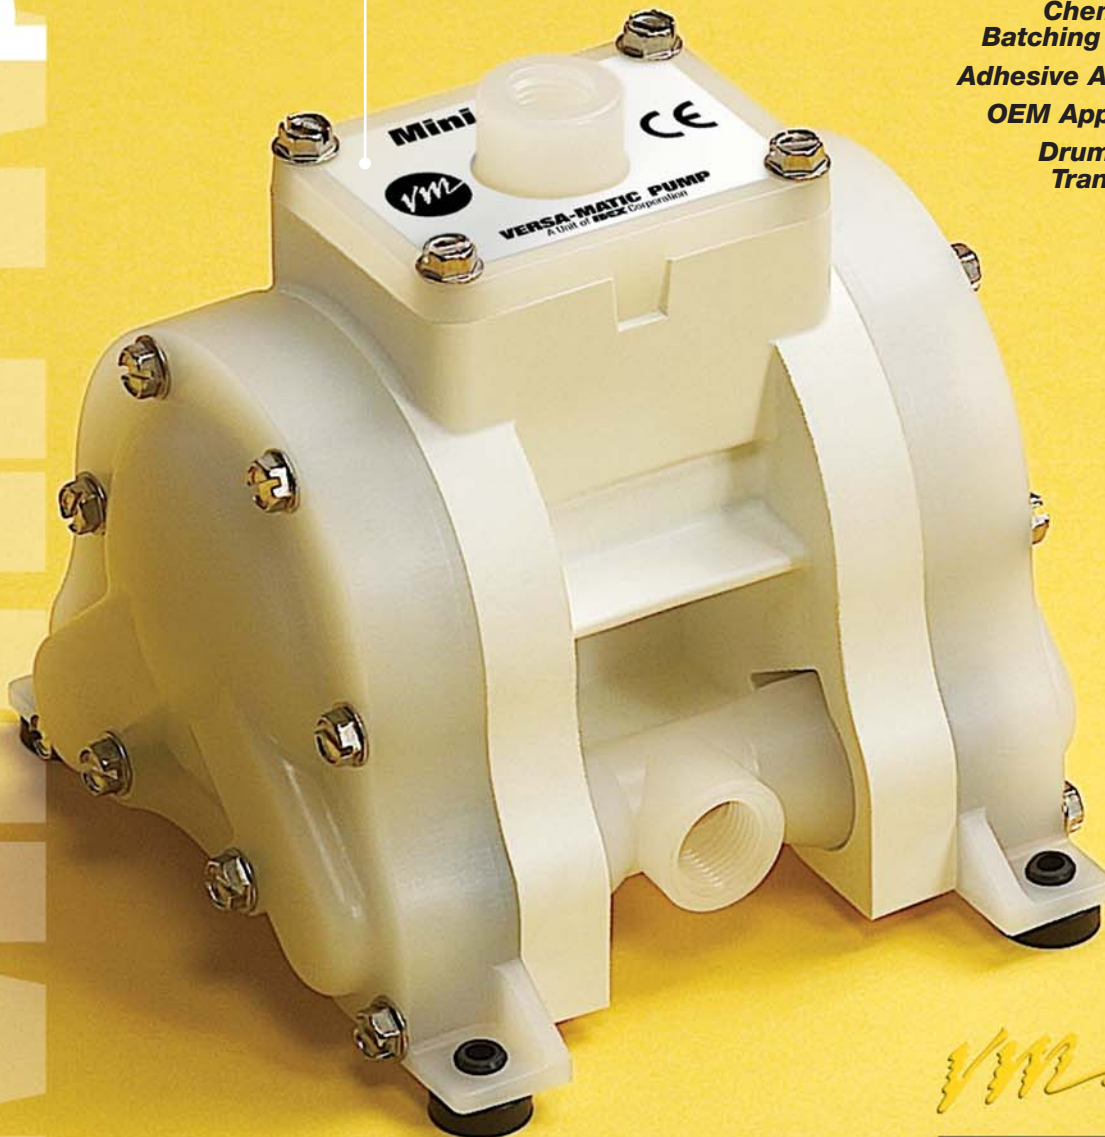

**VERSA-MATIC  
PUMP**

**E8**  
**3 / 8 INCH  
PUMPS**

***Ink & Pigment  
Dispensing***

***Car Wash Applications***

***Oil and Quick Lube  
Applications***

***Foaming Applications***

***Chemical  
Batching & Dosing***

***Adhesive Applications***

***OEM Applications***

***Drum/Pail  
Transfer***



**IDEX**  
IDEX CORPORATION

# Mini-Matic™ 3/8" Pumps with Elima-Matic® Air Valve Technology



Bridging the gap between 1/4" and 1/2" pumps, the new Versa-Matic Mini-Matic™ 3/8" pumps pack a lot into a compact, **economical** package. Small enough to fit in your hand, the Mini-Matics can pump up to **6.8 gallons per minute**. And because they feature our patented Elima-Matic® Air Valve System you can count on **non-stalling, non-icing, lube-free** operation as well as the **elimination of blow-by**.




The Mini-Matics also offer tremendous **versatility**. They can be **mounted upright, sideways** and even **inverted** to adapt to your application. Available in **Polypropylene** and **Kynar®** wetted materials of construction, with **XL (Santoprene®)**, **Geolast®** or **Teflon®** interior.

For a mini pump that delivers the max, turn to a Versa-Matic Mini-Matic. Consult your authorized distributor for more details.

## PERFORMANCE

E8

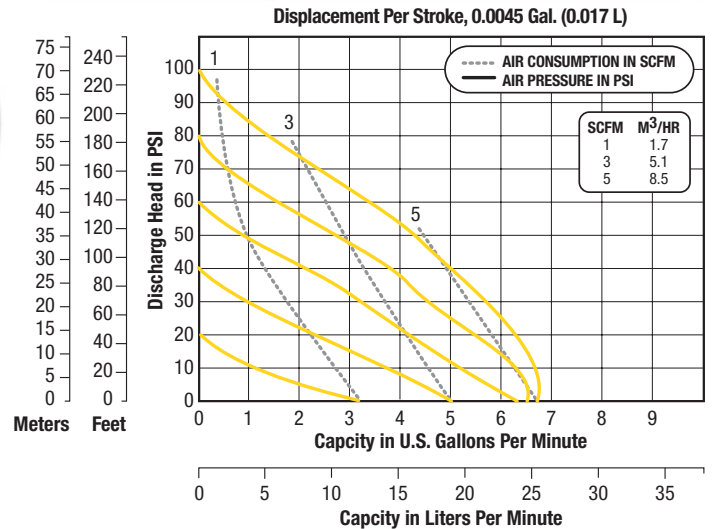

## SPECIFICATIONS

E8

	English	Metric
<b>Flow rate</b>		
adjustable to	0-6.8 gpm	0-26 lpm
<b>Port size</b>		
Inlet and Outlet	3/8" NPTF (BSP)	
<b>Air inlet</b>	0.25" NPTF	
<b>Air exhaust</b>	0.25" NPTF	
<b>Suction lift dry</b>	11'	3.4 m
Teflon® dry	11'	3.4 m
<b>Max. particle size</b>		
Diameter	0.10"	2.5 mm
<b>Shipping weight</b>		
Polypropylene	3.0 lbs	1.4 kg
Kynar	3.0 lbs	1.4 kg

Teflon® is a registered trademark of DuPont.  
Kynar® is a registered trademark of Penwalt Corp.  
Geolast® and Santoprene® are registered trademarks of Advanced Elastomer Systems.


**Caution:** Do not exceed 100 PSIG (6.8 bars) air supply or liquid pressure.

## DIMENSIONS

E8

### Mini-Matic Plastic Pumps

Consult factory for certified drawings

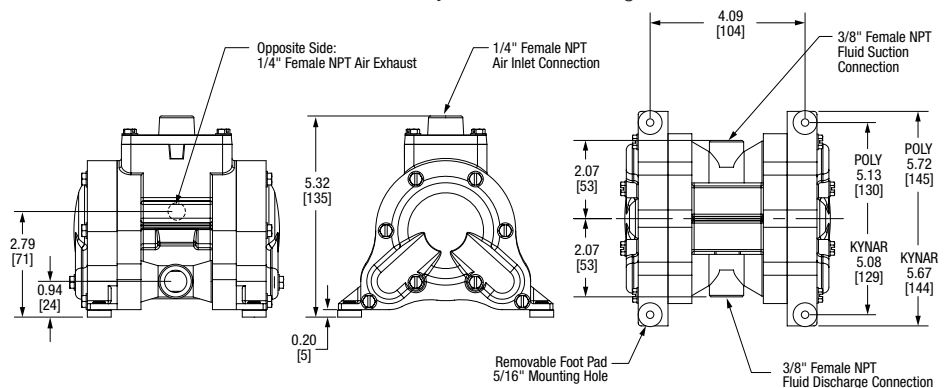

Measurements in inches (millimeters)

### Available Models

Poly pump w/XL	..... E8PP6XK69	Kynar pump w/XL	..... E8KP6XK69
Poly pump w/Geolast	..... E8PP9XK99	Kynar pump w/Geolast	..... E8KP9XK99
Poly pump w/Teflon	..... E8PP5TKP9	Kynar pump w/Teflon	..... E8KP5TKP9



### VERSA-MATIC® PUMP COMPANY

A Unit of IDEX Corporation  
6017 Enterprise Drive  
Export, PA 15632-8969

(724) 327-7867

Fax: (724) 327-4300

www.versamatic.com



©2004 IDEX Corporation

VME8-0704-1