


PERFORMANCE CURVE

2 POLE 50 Hz

V09

50-125/2.2 (2.2kW) – impeller diameter = 126 mm
 50-125/3 (3.0kW) – impeller diameter = 131 mm
 50-125/4 (4.0kW) – impeller diameter = 140 mm

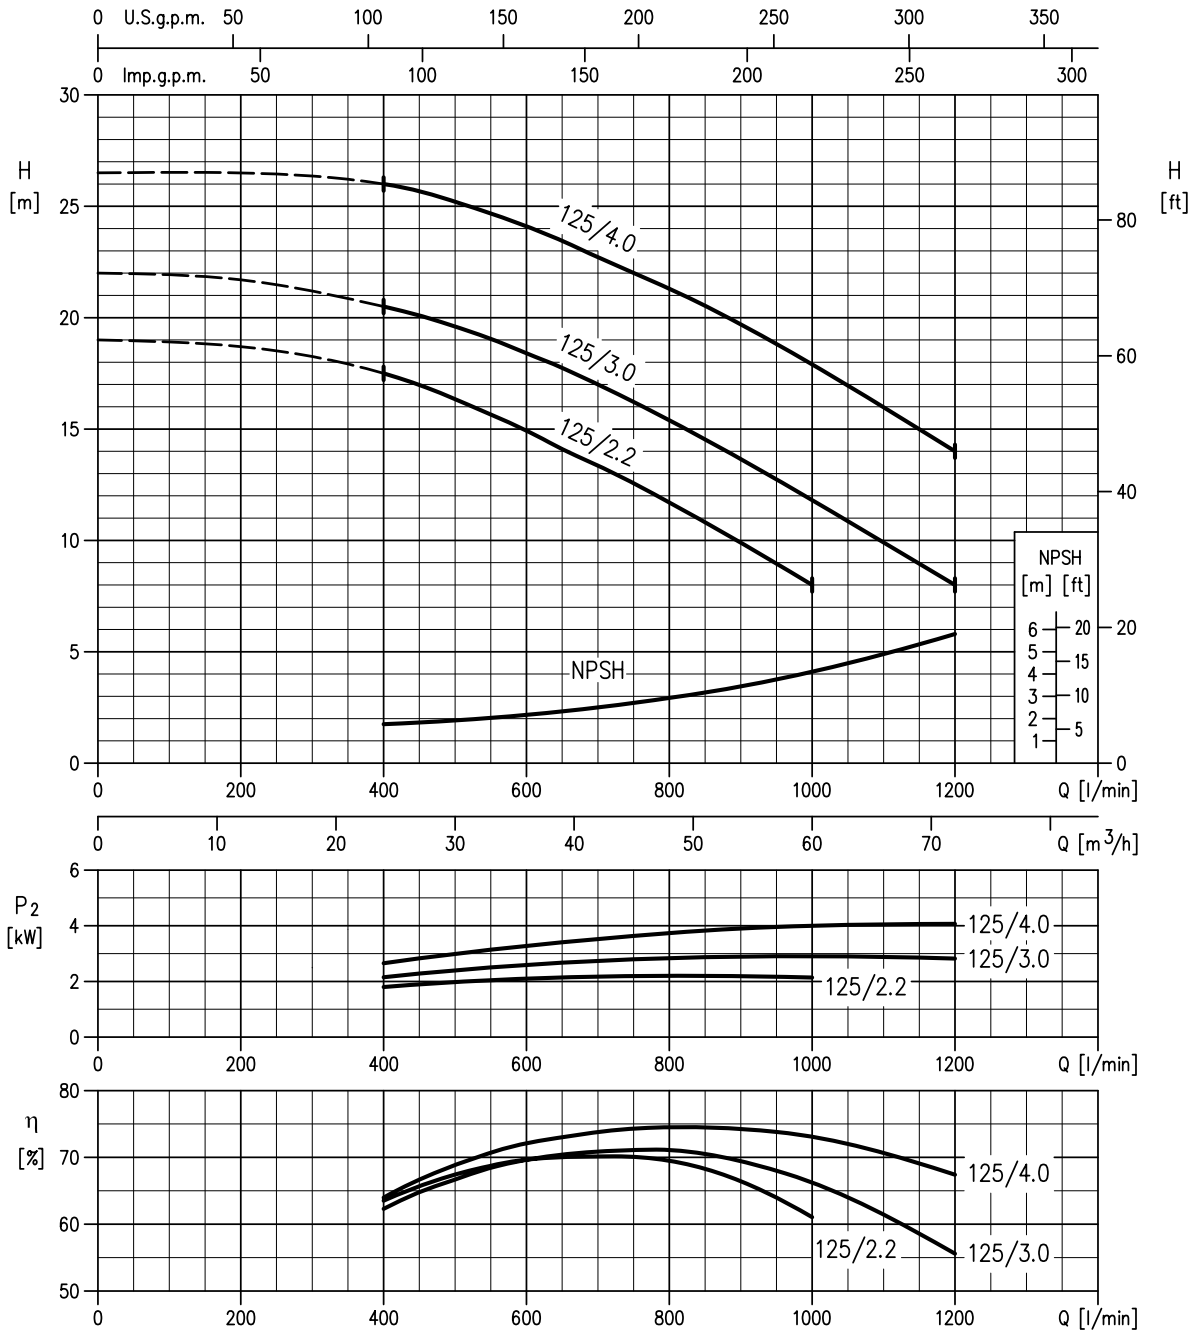

Rotation speed ≈2900 min⁻¹
 Test standard : ISO 9906 Annex A