


Pump Model	Motor Output	Nominal Duty	
		Flow Rate	Pressure
MATRIX 3-3T/0.65M	0.65 kW	45 lpm	250 kPa
MATRIX 3-4T/0.65M	0.65 kW	50 lpm	310 kPa
MATRIX 3-5T/0.75M	0.75 kW	55 lpm	360 kPa
MATRIX 3-6T/0.9M	0.9 kW	60 lpm	400 kPa
MATRIX 5-4T/0.9M	0.9 kW	80 lpm	340 kPa
MATRIX 5-5T/1.3M	1.3 kW	85 lpm	400 kPa
MATRIX 5-6T/1.3M	1.3 kW	90 lpm	470 kPa
# MATRIX 10-4T/1.5M	1.5 kW	155 lpm	340 kPa
# MATRIX 10-5T/2.2M	2.2 kW	155 lpm	425 kPa


Larger models (up to 14 taps) not shown on chart.

Pressure loss through controller

Note: The pressure loss through any automatic controller needs to be considered when selecting a suitable system.

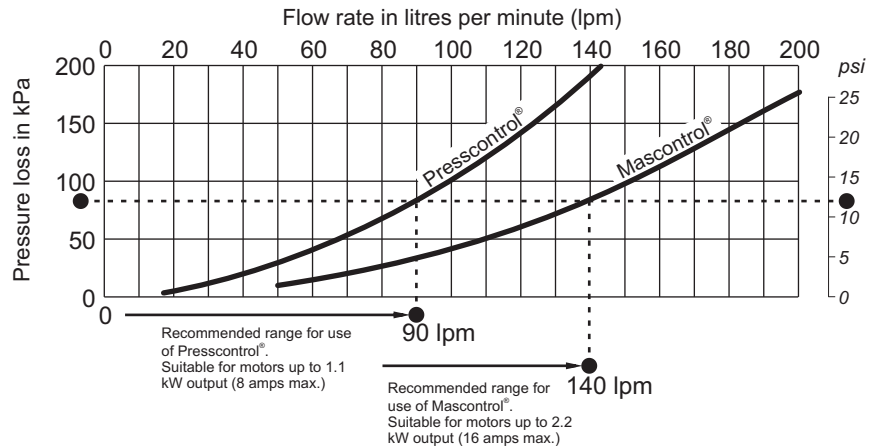

Packing Dimensions & Weights

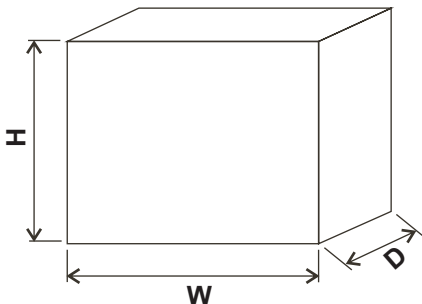

Pump Model	Packing Size (cm)			Approx. Shipping Weight
	W	D	H	
Single Phase				
MATRIX 3-3T/0.65M	46	26	42	14 kg
MATRIX 3-4T/0.65M	46	26	42	14 kg
MATRIX 3-5T/0.75M	46	26	42	16 kg
MATRIX 3-6T/0.9M	46	26	42	17 kg
MATRIX 5-4T/0.9M	49	31	42	16 kg
MATRIX 5-5T/1.3M	49	31	42	20 kg
MATRIX 5-6T/1.3M	49	31	42	21 kg
MATRIX 10-4T/1.5M	49	31	42	23 kg
* MATRIX 10-5T/2.2M	59	36	55	25 kg

* on skid